

## LED Intelligent Driver



- Dimming interface: DALI.
- T-PWM™ digital dimming, present a perfect visual experience.
- Dimming range: 0~100%, LED start at 0.01% possible.
- DALI dimming curve: liner curve or logarithmic curve.
- Flicker-free (IEEE 1789), achieve the level of exemption assessment.
- Innovative thermal management technology, intelligent power life protection.
- Over-heat / Over load / Short circuit protection.
- Class 2 power supply. Full protective plastic housing.
- DALI bus standard: IEC62386-101,102, 207.
- Compliant with Safety Extra Low Voltage standard.
- Suitable for internal lights application for I /II/III.

**T-PWM™**  
Super depth dimming technology

**Flicker-free**  
IEEE 1789

Dimmable:  
■■■■■■■■■■  
0.01-100%

SELV □ ⊕ ⊖ ⚡ CE RoHS



### Specification

Model	DALI-10-100-400-F1P1	DALI-10-350-700-F1P1	
OUTPUT	Output Voltage	10-45Vdc	3-24Vdc
	Max Output Voltage	47Vdc	26Vdc
	Output Current	100-400mA	350-700mA
	Output Power	Max. 10W	
	Strobe Level	Exemption assessment level.	
	Dimming Range:	0~100%, LED start at 0.1% possible.	
	LF current ripple(<120Hz)	<2%	
	Current Accuracy	±5%	
	Ripple & Noise	≤2V	
PWM Frequency	≤3600Hz		
INPUT	Dimming Interface	DALI	
	Input Voltage Range	100-240Vac	
	Frequency	50/60Hz	
	Input Current	0.2A@115Vac, 0.15A@230Vac	
	Efficiency	>82%	>79%
	Inrush Current(typ.)	Cold start 20A at 230Vac	
	Control surge capability	L-N: 1kV	
	Leakage Current	<0.5mA/230Vac	
ENVIRONMENT	Working Temperature	ta: -30°C ~ 55°C tc: 80°C	
	Working Humidity	20 ~ 95%RH, non-condensing	
	Storage Temp., Humidity	-40°C ~ 80°C, 10-95%RH	
	Temp. Coefficient	±0.03%/°C (0-50°C)	
	Vibration	10-500Hz, 2G 12min./1cycle, period for 72min. each along X, Y, Z axes.	
PROTECTION	Over Load Protection	When O/P voltage exceed its range, O/P current declines, auto recovers when the load is reduced.	
	Over-heat Protection	Shut down the output when PCB temp. ≥ 110°C, auto recovers when temp. back to normal.	
	Short Circuit Protection	Shut down automatically if short circuit occurs, auto recovers after faulty condition is removed.	
SAFETY & EMC	Withstand Voltage	I/P-O/P: 3750Vac	
	Isolation Resistance	I/P-O/P: 100MΩ/500VDC/25°C/70%RH	
	Safety Standards	IEC/EN61347-1, IEC/EN61347-2-13	
	Strobe Test Standard	IEEE 1789	
OTHERS	Dimension	135×30×320mm(L×W×H)	
	Packing	140×34×23mm(L×W×H)	
	Weight(G.W.)	80g±10g	

## LED Current Selection

Note: Please specify the output current when make orders.


If you need to change the output current in special cases, please open the housing in outages and select the current by built-in DIP switch on the PCB.



DIP Switch		↓ ↓ ↑	↓ ↑ ↓	↓ ↑ ↑	↑ ↓ ↓	↑ ↓ ↑	↑ ↑ ↓	↑ ↑ ↑	↑ ↓ ON OFF
DALI-10-100-400-F1P1	Output Current	100mA	150mA	200mA	250mA	300mA	350mA	400mA	
	Output Voltage	10-45V	10-45V	10-45V	10-40V	10-33V	10-28V	10-25V	
	Output Power	1-4.5W	1.5-6.75W	2-9W	2.5-10W	3-9.9W	3.5-9.8W	4-10W	


DIP Switch		↓ ↓ ↓	↓ ↓ ↑	↓ ↑ ↓	↓ ↑ ↑	↑ ↓ ↓	↑ ↓ ↑	↑ ↑ ↓	↑ ↑ ↑	↑ ↓ ON OFF
DALI-10-350-700-F1P1	Output Current	350mA	400mA	450mA	500mA	550mA	600mA	650mA	700mA	
	Output Voltage	3-24V	3-24V	3-22V	3-20V	3-18V	3-16V	3-15V	3-14V	
	Output Power	1.05-8.4W	1.2-9.6W	1.35-9.9W	1.5-10W	1.65-9.9W	1.8-9.6W	1.95-9.75W	2.1-9.8W	

## Wiring Diagram

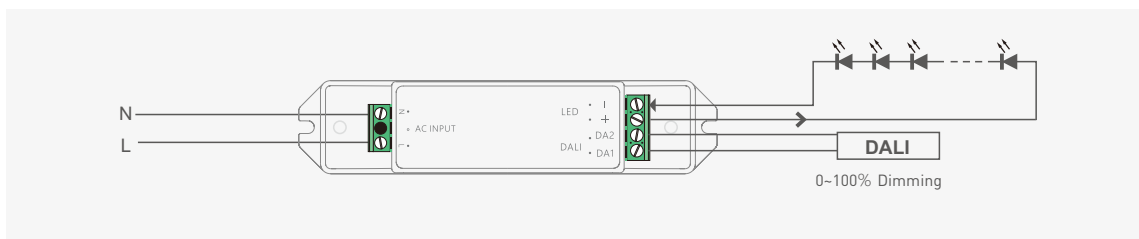

## Dimensions

Unit : mm

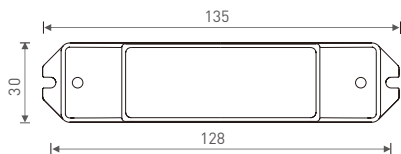

\* No further notice if any changes in the manual.  
Product function depends on the goods.  
Please feel free to contact our official distributor if any question.