LT-704-5A



0~240 ...480W (0~5A)×4CH

1-10V LED Dimming Driver

- Dimming interface: 0-10V ,1-10V ,10V PWM ,push button.
- PWM digital dimming, no alter LED color rendering index. .
- Dimming range: 0~100%, LED start at 0.1% possible. ٠
- Max. current output: 20A. .
- Short circuit / Over current protection, recover automatically. .
- Full protective plastic housing. •
- Suitable for indoor environments.






12~24V

Main Characteristics


Dimming Interface:	0-10V, 1-10V ,10V PWM, push button	Protection:	Short circuit / Over current, recover automatically
Input Voltage:	12~24Vdc	Dimming Range:	0~100%, LED start at 0.1% possible.
Output Voltage:	12~24Vdc	Working Temperature:	-30°C~55°C
Output:	5A×4CH Max.20A	Product Size:	L175×W44×H30(mm)
Max. Output Power:	0-240W480W	Package Size:	L178×W48×H33(mm)
		Weight(G.W.):	150g

Dimensions






System Connection Diagram:

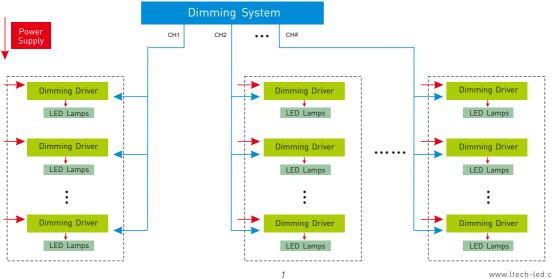

Connections





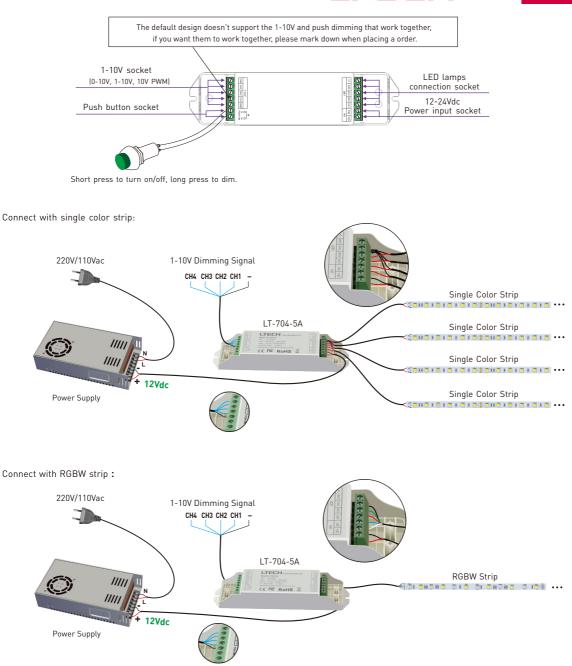

2